

Super Quiet Generators
**SUPER QUIET GENERATORS
T270**

STANDARD FEATURES

- Versatile solution for your worksite power needs
- Rental ready mobile generator package
- Heavy duty 4 cycle diesel engine
- User friendly control panel

Specifications

System Rating at 60 Hz	
Prime	214 kW / 267 kVA
Standby	230 kW / 288 kVA
System Power Output at Prime	
Available 3 phase voltage	208 / 220 / 240 / 440 / 480
Associated 3 phase amps (0.8 power factor)	743 / 703 / 644 / 351 / 322
1 phase power	130 kW
1 phase kVA	130 kVA
Available 1 phase voltage	120 / 240
Associated 1 phase amps (1.0 power factor)	1084 / 542
Max amp rating (main breaker size)	900 A

Super Quiet Generator T270

Specifications


Engine		T270
Manufacturer	Cummins	
Model	QSL9-G2	
Horsepower - prime (1,800 rpm)	320 hp (239 kWm)	
Description	Tier III 6 cylinder, 4-cycle, water cooled, OHV, in-line, direct injection	
Bore & stroke	4.49 x 5.69 in (114 x 145 mm)	
Piston displacement	537 in ³ (8.8 L)	
Compression ratio	16.8 : 1	
Exhaust system	critical grade silencer	
Monitoring gauges	oil pressure, water temperature, fuel level, battery voltage, hours	
Coolant capacity - engine only	11.6 qts (11 L)	
Cooling system	liquid cooled - air to air CAC - rated to 105° F ambient	

Fuel System										
Specification	#2 diesel									
Filter	fuel / water separator									
Capacity	300 gal (1,136 L)									
Tank and containment	internal fuel tank with 110% fluid spill containment									
Consumption (run time)	<table border="0"> <tr> <td>Full load</td> <td>14 gal/hr (53 L/hr)</td> <td>16.5 hr</td> </tr> <tr> <td>3/4 load</td> <td>11.3 gal/hr (42.8 L/hr)</td> <td>22.7 hr</td> </tr> <tr> <td>Half load</td> <td>8 gal/hr (30.3 L/hr)</td> <td>33.5 hr</td> </tr> </table>	Full load	14 gal/hr (53 L/hr)	16.5 hr	3/4 load	11.3 gal/hr (42.8 L/hr)	22.7 hr	Half load	8 gal/hr (30.3 L/hr)	33.5 hr
Full load	14 gal/hr (53 L/hr)	16.5 hr								
3/4 load	11.3 gal/hr (42.8 L/hr)	22.7 hr								
Half load	8 gal/hr (30.3 L/hr)	33.5 hr								

System Controls and Distribution	
Engine governor	ECM controlled (+/- .25%)
Protection (safety shutdowns)	low oil pressure, high water temp., overcrank, overspeed, underspeed
Generator gauges	voltmeter, ammeter, Hz meter
Receptacles, 120 V	2 Each 20 Amp GFCI Duplex
Receptacles, 240 V	2 Each 50 Amp Tempower T/L
Primary Distribution	5 lug terminals with mainline circuit breaker

Generator	
Manufacturer	Newage
Rating (0.8 power factor)	250 kW 3 Phase @ 480 / 240 V
Description	brushless, 4 pole, synchronous, single bearing
Insulation	Class H
Temperature rating	125° C rise over 40° C ambient
Automatic voltage regulator	external, solid state, adjustable
Voltage regulation	+/- 1%
Frequency (speed)	60 Hertz (1,800 rpm)

Packaging					
Enclosure	sound attenuated, weatherproof with lockable doors				
Sound levels	69 dBA at 23 ft (7 m)				
Lifting system	roof mounted, single point				
Weight (no trailer)	<table border="0"> <tr> <td>empty</td> <td>8,580 lbs (3,892 kg)</td> </tr> <tr> <td>full</td> <td>10,680 lbs (4,844 kg)</td> </tr> </table>	empty	8,580 lbs (3,892 kg)	full	10,680 lbs (4,844 kg)
empty	8,580 lbs (3,892 kg)				
full	10,680 lbs (4,844 kg)				
Dimensions - L x W x H (no trailer)	144 x 50 x 87 in (366 x 127 x 221 cm)				
Weight (with trailer)	<table border="0"> <tr> <td>empty</td> <td>10,460 lbs (4,745 kg)</td> </tr> <tr> <td>full</td> <td>12,560 lbs (5,697 kg)</td> </tr> </table>	empty	10,460 lbs (4,745 kg)	full	12,560 lbs (5,697 kg)
empty	10,460 lbs (4,745 kg)				
full	12,560 lbs (5,697 kg)				
Dimensions - L x W x H (with trailer)	206 x 84 x 106 in (523 x 213 x 269 cm)				

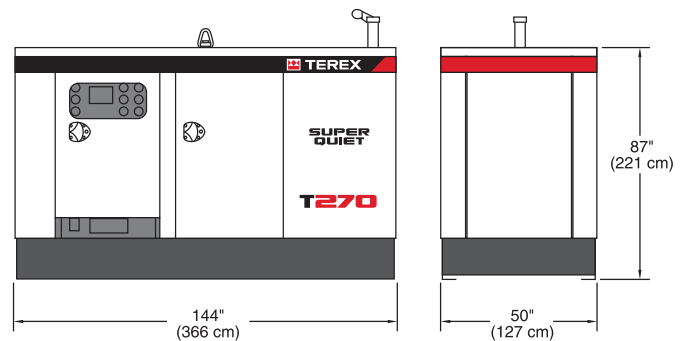

For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local Genie distributor.



Genie Industries, Inc.

A Terex Company

18340 NE 76th Street
PO Box 97030

Redmond, WA 98073-9730

TEL +1 (425) 881-1800

TOLL FREE +1 (800) 536-1800

PARTS & TECH SUPPORT +1 (800) 228-6444

FAX +1 (425) 883-3475

WEB www.genieindustries.com

Effective Date: July, 2008. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the U.S.A. and many other countries. Genie® is a registered trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. © 2008 Terex Corporation.